UTPA THE UNIVERSITY OF TEXAS-PAN AMERICAN™ MECHANICAL ENGINEERING DEPARTMENT

Assignment: _____

Name: _____

Date: ____/____/_____

HW#1 ->1.6, 1.16, 1.28, 1.34, 2.10, 2.24, 2.29, 2.42

Conduction

1.6 A glass window of width $W = 1$ m and height $H = 2$ m is 5 mm thick and has a thermal conductivity of $k_g = 1.4$ W/m · K. If the inner and outer surface temperatures of the glass are 15°C and −20°C, respectively, on a cold winter day, what is the rate of heat loss through the glass? To reduce heat loss through windows, it is customary to use a double pane construction in which adjoining panes are separated by an air space. If the spacing is 10 mm and the glass surfaces in contact with the air have temperatures of 10°C and −15°C, what is the rate of heat loss from a 1 m × 2 m window? The thermal conductivity of air is $k_a = 0.024$ W/m · K.

UTPA THE UNIVERSITY OF TEXAS-PAN AMERICAN™ MECHANICAL ENGINEERING DEPARTMENT

Assignment: _____

Name: _____

Date: ____/____/_____

HW#1 ->1.6, 1.16, 1.28, 1.34, 2.10, 2.24, 2.29, 2.42

1.16 A cartridge electrical heater is shaped as a cylinder of length $L = 200$ mm and outer diameter $D = 20$ mm. Under normal operating conditions the heater dissipates 2 kW while submerged in a water flow that is at 20°C and provides a convection heat transfer coefficient of $h = 5000$ W/m$^2 \cdot$K. Neglecting heat transfer from the ends of the heater, determine its surface temperature T_s. If the water flow is inadvertently terminated while the heater continues to operate, the heater surface is exposed to air that is also at 20°C but for which $h = 50$ W/m$^2 \cdot$K. What is the corresponding surface temperature? What are the consequences of such an event? If the transmission efficiency is $\eta = 0.93$ and air flow over the case corresponds to $T_\infty = 30$°C and $h = 200$ W/m$^2 \cdot$K, what is the surface temperature of the transmission?

UTPA THE UNIVERSITY OF TEXAS-PAN AMERICAN™ MECHANICAL ENGINEERING DEPARTMENT

Assignment: _____

Name: _____

Date: ____/____/_____

HW#1 ->1.6, 1.16, 1.28, 1.34, 2.10, 2.24, 2.29, 2.42

Radiation

1.28 An overhead 25-m-long, uninsulated industrial steam pipe of 100 mm diameter is routed through a building whose walls and air are at 25°C. Pressurized steam maintains a pipe surface temperature of 150°C, and the coefficient associated with natural convection is $h = 10$ W/m$^2 \cdot$ K. The surface emissivity is $\varepsilon = 0.8$.

(a) What is the rate of heat loss from the steam line?

(b) If the steam is generated in a gas-fired boiler operating at an efficiency of $\eta_f = 0.90$ and natural gas is priced at C_g = \$0.01 per MJ, what is the annual cost of heat loss from the line?

UTPA THE UNIVERSITY OF TEXAS-PAN AMERICAN™ MECHANICAL ENGINEERING DEPARTMENT

Assignment: _____

Name: _____

Date: ____/____/_____

HW#1 ->1.6, 1.16, 1.28, 1.34, 2.10, 2.24, 2.29, 2.42

Energy Balance and Multimode Effects

1.34 An electrical resistor is connected to a battery, as shown schematically. After a brief transient, the resistor assumes a nearly uniform, steady-state temperature of 95°C, while the battery and lead wires remain at the ambient temperature of 25°C. Neglect the electrical resistance of the lead wires.

(a) Consider the resistor as a system about which a control surface is placed and Equation 1.11c is applied. Determine the corresponding values of $\dot{E}_{in}$(W), $\dot{E}_g$(W), $\dot{E}_{out}$(W), and $\dot{E}_{st}$(W). If a control surface is placed about the entire system, what are the values of $\dot{E}_{in}$, $\dot{E}_g$, $\dot{E}_{out}$, and $\dot{E}_{st}$?

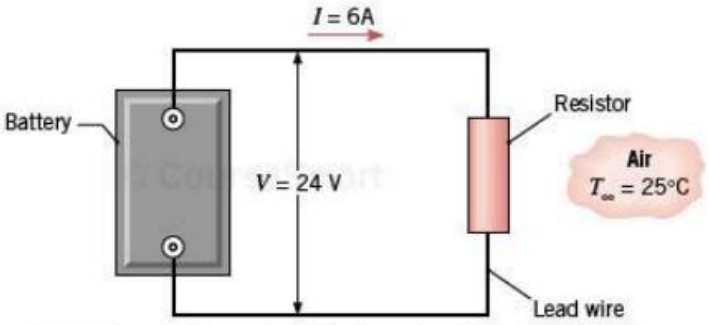

(b) If electrical energy is dissipated uniformly within the resistor, which is a cylinder of diameter $D = 60$ mm and length $L = 250$ mm, what is the volumetric heat generation rate, $\dot{q}$ (W/m^3)?

(c) Neglecting radiation from the resistor, what is the convection coefficient?

UTPA THE UNIVERSITY OF TEXAS-PAN AMERICAN™ MECHANICAL ENGINEERING DEPARTMENT

Assignment: _____

Name: _____

Date: ____/____/_____

HW#1 ->1.6, 1.16, 1.28, 1.34, 2.10, 2.24, 2.29, 2.42

2.10 A cylinder of radius r_o, length L, and thermal conductivity k is immersed in a fluid of convection coefficient h and unknown temperature T_∞. At a certain instant the temperature distribution in the cylinder is $T(r) = a + br^2$, where a and b are constants. Obtain expressions for the heat transfer rate at r_o and the fluid temperature.

UTPA THE UNIVERSITY OF TEXAS-PAN AMERICAN™ MECHANICAL ENGINEERING DEPARTMENT

Assignment: _____

Name: _____

Date: ____/____/_____

HW#1 ->1.6, 1.16, 1.28, 1.34, 2.10, 2.24, 2.29, 2.42

The Heat Equation

2.24 The temperature distribution across a wall 0.3 m thick at a certain instant of time is $T(x) = a + bx + cx^2$, where T is in degrees Celsius and x is in meters, $a = 200°C$, $b = -200°C/m$, and $c = 30°C/m^2$. The wall has a thermal conductivity of 1 $W/m \cdot K$.

(a) On a unit surface area basis, determine the rate of heat transfer into and out of the wall and the rate of change of energy stored by the wall.

(b) If the cold surface is exposed to a fluid at 100°C, what is the convection coefficient?

UTPA THE UNIVERSITY OF TEXAS-PAN AMERICAN™ MECHANICAL ENGINEERING DEPARTMENT

Assignment: _____

Name: _____

Date: ____/____/_____

HW#1 ->1.6, 1.16, 1.28, 1.34, 2.10, 2.24, 2.29, 2.42

2.29 The steady-state temperature distribution in a one-dimensional wall of thermal conductivity k and thickness L is of the form $T = ax^3 + bx^2 + cx + d$. Derive expressions for the heat generation rate per unit volume in the wall and the heat fluxes at the two wall faces ($x = 0, L$).

UTPA THE UNIVERSITY OF TEXAS-PAN AMERICAN™ MECHANICAL ENGINEERING DEPARTMENT

Assignment: _____

Name: _____

Date: ____/____/_____

HW#1 ->1.6, 1.16, 1.28, 1.34, 2.10, 2.24, 2.29, 2.42

2.42 A spherical shell of inner and outer radii r_i and r_o, respectively, contains heat-dissipating components, and at a particular instant the temperature distribution in the shell is known to be of the form

$$T(r) = \frac{C_1}{r} + C_2$$

Are conditions steady-state or transient? How do the heat flux and heat rate vary with radius?